

### Soft and Comfortable Signal Light Emitted through the Translucent Milky Lens



#### Common Specifications(QTR50/ QTR60/ QTR70)

- Modular LED steady/flashing signal tower lights
- Soft and comfortable signal light emitted through the translucent milky lens
- When the product is turned off the milky color filter provides comfortable viewing at close proximity for the operator
- Can select from size selections of Ø50mm, Ø60mm, and Ø70mm to fit your sophisticated application needs
- The addition of modules and change in color arrangement can be achieved without the use of tools by using the Lock-type structure
- QTRA type offers a nifty integrated lens and cover for a simple aesthetically pleasing product
- A variety of mounting brackets selections for the pole mount type to fit your location and mounting needs
- Built-in buzzer available (Volume : Max 85dB at 1m)
- Available in customized 2 sound buzzer type and high volume(100dB) buzzer type
- Pre-wired is standard. Can customize the product with the M12 connector if requested
- Can be used with NPN open collector transistor driven input, which allows direct connection to a PLC
- Flashing rate : 60-80 flashes/min.
- Materials : Lens-PC, Housing-ABS, Pole-AI
- Ambient operating temperature : -30°C to +50°C
- Protection rating: Standard type-IP65, Built-in buzzer type-IP54
- Certificates : CE Compliant, UL Listed
- Compliant with RoHS directive



- **Each modular color lens can be added without additional tools**  
QTR model uses a special contact structure for stable operation, the lens modules lock into place by rotating the modular structures together. This allows for easy changes to the color arrangement without any tools. Additional modules can be added.



#### • QTR series special lens

QTR series provides soft and comfortable signal light emitted through the translucent milky lens.

#### • Buzzer volume is adjusted via the volume control lever

QTR type volume can be adjusted for each specific working condition with the equipped buzzer volume control lever at the bottom of the product.(-BZ type)


- 1 **High volume buzzer (100dB) option can be fitted to the top of the product.**  
High volume 100dB volume buzzer module fastened to the top of the product provides 360 degree buzzer signal output which cannot be achieved with the single directional buzzer.(Buzzer volume cannot be adjusted)
- 2 **Integrated Housing cover and lens model (QTRA50/ QTRA60/ QTRA70)**  
The sleek housing cover and lens model is made of one piece for a simple unified look.
- 3 **Cable end M12 connector attached type (Customization)**  
Pre-wired is standard. Can customize the product with the M12 connector if requested.
- 4 **Can select from a variety of mounting bracket options to fit your application needs and build environment**  
There are a variety of mounting bracket options available depending on cost and installation requirements.

# QTR50L

## Ø50mm LED Steady/Flashing Tower Lights



QTR50L series

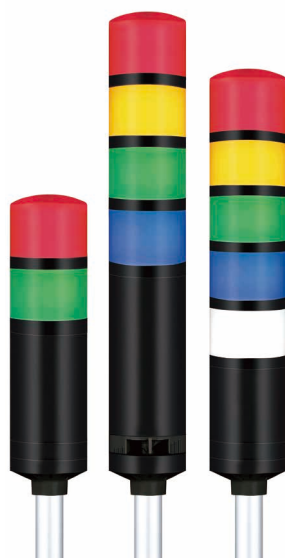

QTRA50L series

### • Customization



• Customized cable end M12 connector attached type available.

### QTR50L Ø50mm Pole Mount, LED Steady/Flashing Type

Model number	Layer	Voltage	Current	Certificates	Weight	Color	
QTR50L Steady	1	AC/DC12V	0.085A	   DC24V only	0.34kg	● R-Red	
QTR50L-BZ Steady /w built-in buzzer		AC/DC24V	0.065A		0.34kg		
QTR50LF Steady/Flashing	2	AC/DC12V	0.170A		0.43kg	● R-Red ● G-Green	
QTR50LF-BZ Steady/Flashing /w built-in buzzer		AC/DC24V	0.130A				0.53kg
QTRA50L Steady	3	AC/DC12V	0.255A		 DC24V only	0.51kg	● R-Red ● A-Amber ● G-Green
QTRA50L-BZ Steady /w built-in buzzer		AC/DC24V	0.195A			0.51kg	
QTRA50LF Steady/Flashing	4	AC/DC12V	0.340A			0.60kg	● R-Red ● A-Amber ● G-Green ● B-Blue
QTRA50LF-BZ Steady/Flashing /w built-in buzzer		AC/DC24V	0.260A				
QTRA50LF Steady/Flashing /w built-in buzzer	5	AC/DC12V	0.425A			0.68kg	● R-Red ● A-Amber ● G-Green ● B-Blue ● W-White
QTRA50LF-BZ Steady/Flashing /w built-in buzzer		AC/DC24V	0.325A				
		AC110V-220V	Max 0.045A			0.44kg	
		AC110V-220V	Max 0.065A			0.53kg	
		AC110V-220V	Max 0.085A			0.61kg	
		AC110V-220V	Max 0.105A			0.70kg	
		AC110V-220V	Max 0.125A		0.78kg		

\* AC type model has a free-voltage range of 100V-240V.

### Wiring Instructions

- External power line : UL1015 AWG18(0.75sq)×2C 400mm
- External signal line : UL1007 AWG22(0.3sq) 400mm
- LED tower light can be wiring with external contact and transistor

\* Please refer to page 88-89 for detailed wiring instructions.

### Mounting Bracket

Standard	LB18	LW18	QZ18	SZ18	QL18	SL18	QLA18
Steel	Steel	PC	PC	Al	PC	Al	PC

\* Please refer to page 188-193 for detailed dimensions.

### Customization

- 2 buzzer sound types : Both prolonged (beep, beep) and staccato (beep, beep, beep) buzzer output available
- Customized pole length available
- High buzzer module equipped on top(Lens should be 4 layers or less)
- Cable end M12 connector attached type

### Ordering Specification

<b>QTR50L</b>	-	<b>3</b>	-	<b>24</b>	-	<b>RAG</b>	-	<b>LW18</b>
[Model number]		[Layer]		[Voltage]		[Color]		[Mounting bracket]
<ul style="list-style-type: none"> <li>• QTR50L</li> <li>• QTR50L-BZ</li> <li>• QTR50LF</li> <li>• QTR50LF-BZ</li> <li>• QTRA50L</li> <li>• QTRA50L-BZ</li> <li>• QTRA50LF</li> <li>• QTRA50LF-BZ</li> </ul>		<ul style="list-style-type: none"> <li>• 1-1Layer</li> <li>• 2-2Layers</li> <li>• 3-3Layers</li> <li>• 4-4Layers</li> <li>• 5-5Layers</li> </ul>		<ul style="list-style-type: none"> <li>• 12-DC12V</li> <li>• 24-DC24V</li> <li>• 110/220</li> <li>-AC110V-220V</li> </ul>		<ul style="list-style-type: none"> <li>● R-Red</li> <li>● A-Amber</li> <li>● G-Green</li> <li>● B-Blue</li> <li>● W-White</li> </ul>		<ul style="list-style-type: none"> <li>• None</li> <li>-Standard</li> <li>• Bracket</li> <li>-LB18 -LW18</li> <li>-QZ18 -SZ18</li> <li>-QL18 -SL18</li> <li>-QLA18</li> </ul>

# QTR series

## LED Steady/Flashing Tower Lights




### Technical Diagram

(Units : mm)

QTR50ML : DC  
QTR50MLF : DC  
QTR50ML-BZ : DC

QTR50ML : AC  
QTR50MLF-BZ : DC


QTR50MLF : AC  
QTR50ML-BZ : AC  
QTR50MLF-BZ : AC

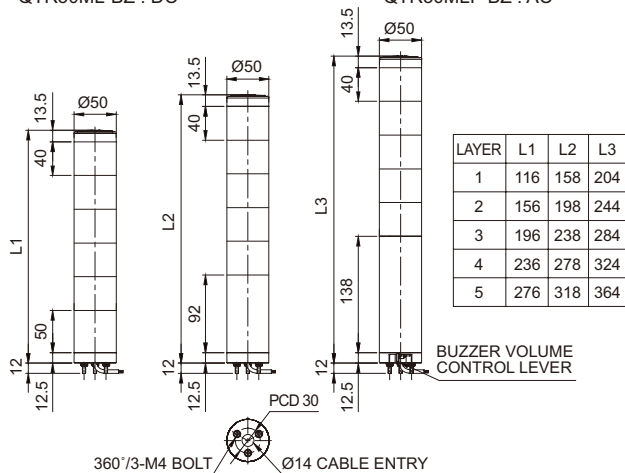

QTR50L : DC  
QTR50LF : DC  
QTR50L-BZ : DC

QTR50L : AC  
QTR50LF-BZ : DC


QTR50LF : AC  
QTR50L-BZ : AC  
QTR50LF-BZ : AC

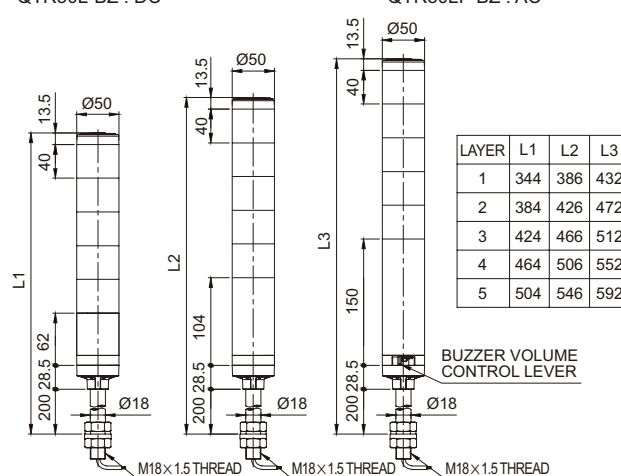

QTR60ML : DC  
QTR60MLF : DC  
QTR60ML-BZ : DC

QTR60ML : AC  
QTR60MLF-BZ : DC


QTR60MLF : AC  
QTR60ML-BZ : AC  
QTR60MLF-BZ : AC

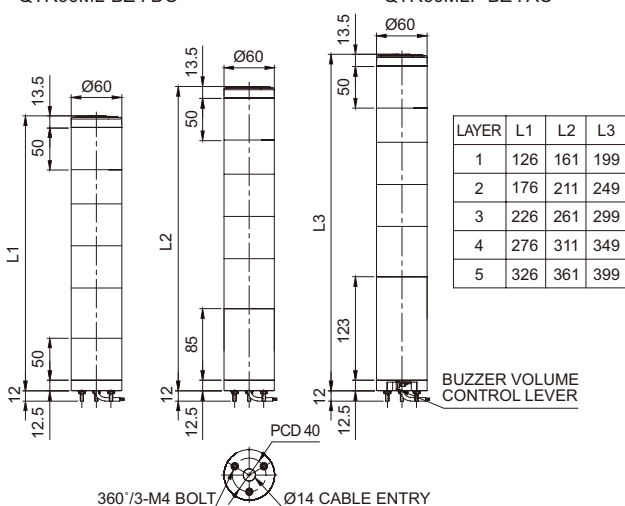

QTR60L : DC  
QTR60LF : DC  
QTR60L-BZ : DC

QTR60L : AC  
QTR60LF-BZ : DC


QTR60LF : AC  
QTR60L-BZ : AC  
QTR60LF-BZ : AC

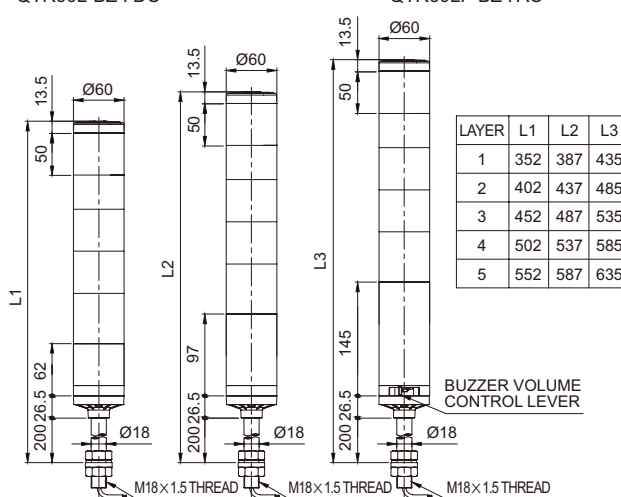

QTR70ML : DC  
QTR70MLF : DC  
QTR70ML-BZ : DC

QTR70ML : AC  
QTR70MLF : AC  
QTR70ML-BZ : AC  
QTR70MLF-BZ : DC


QTR70MLF-BZ : AC

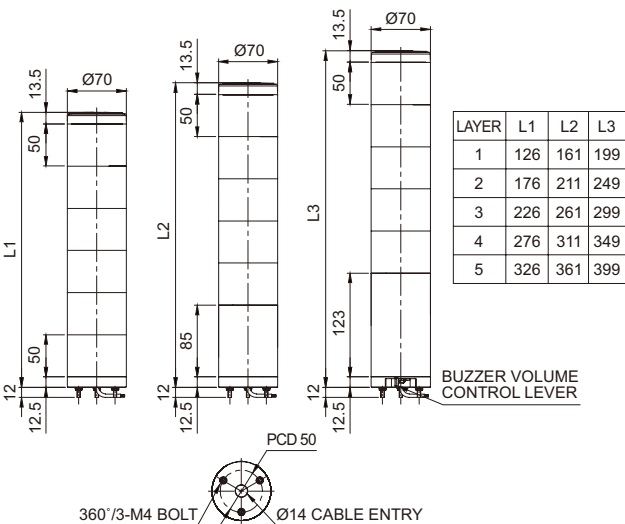

QTR70L : DC  
QTR70LF : DC  
QTR70L-BZ : DC

QTR70L : AC  
QTR70LF : AC  
QTR70L-BZ : AC  
QTR70LF-BZ : DC

QTR70LF-BZ : AC

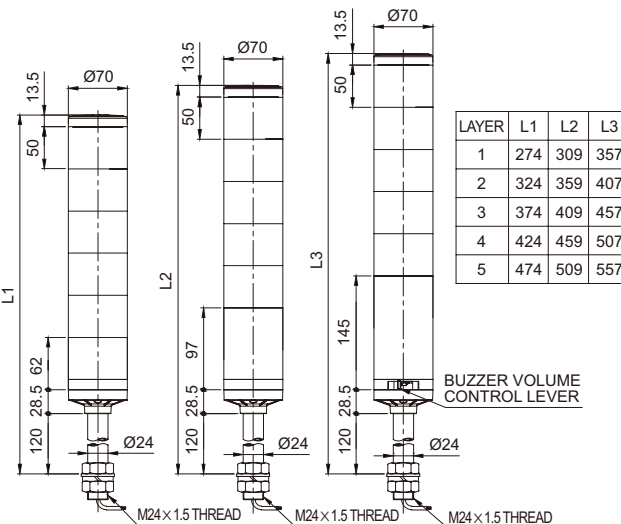

# QTG/QTC/QTR series



## Wiring Instructions(using external contact)

• In case of wiring with external contact, please select the proper transistor type : either NPN or PNP based on the source voltage setting.

Applied products	Wiring Instructions	Applied products	Wiring Instructions
<b>DC Steady</b>  QTG50ML QTG50L QTG60ML QTG60L QTG70ML QTG70L QTC50ML QTC50L QTC60ML QTC60L QTC70ML QTC70L QTR50ML QTR50L QTR60ML QTR60L QTR70ML QTR70L	<p style="text-align: center;">EXTERNAL CONTACT</p> <ul style="list-style-type: none"> <li>• QTG(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTC(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTR(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTGXXL</li> <li>• QTCXXL</li> <li>• QTRXXL</li> </ul> <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>	<b>AC Steady</b>  QTG50ML QTG50L QTG60ML QTG60L QTG70ML QTG70L QTC50ML QTC50L QTC60ML QTC60L QTC70ML QTC70L QTR50ML QTR50L QTR60ML QTR60L QTR70ML QTR70L	<p style="text-align: center;">EXTERNAL CONTACT</p> <ul style="list-style-type: none"> <li>• QTG(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTC(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTR(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTGXXL</li> <li>• QTCXXL</li> <li>• QTRXXL</li> </ul> <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>
<b>DC Steady/Flashing</b>  QTG50MLF QTG50LF QTG60MLF QTG60LF QTG70MLF QTG70LF QTC50MLF QTC50LF QTC60MLF QTC60LF QTC70MLF QTC70LF QTR50MLF QTR50LF QTR60MLF QTR60LF QTR70MLF QTR70LF	<p style="text-align: center;">EXTERNAL CONTACT</p> <ul style="list-style-type: none"> <li>• QTG(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTC(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTR(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTGXXL</li> <li>• QTCXXL</li> <li>• QTRXXL</li> </ul> <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>	<b>AC Steady/Flashing</b>  QTG50MLF QTG50LF QTG60MLF QTG60LF QTG70MLF QTG70LF QTC50MLF QTC50LF QTC60MLF QTC60LF QTC70MLF QTC70LF QTR50MLF QTR50LF QTR60MLF QTR60LF QTR70MLF QTR70LF	<p style="text-align: center;">EXTERNAL CONTACT</p> <ul style="list-style-type: none"> <li>• QTG(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTC(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTR(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTGXXL</li> <li>• QTCXXL</li> <li>• QTRXXL</li> </ul> <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>

- DC steady type : External power/ External signal line : UL1007 AWG22(0.3sq) 400mm
- AC steady, AC/DC steady/flashing type : External power line : UL1015 AWG18(0.75sq)×2C 400mm  
External signal line : UL1007 AWG22(0.3sq) 400mm







# QTG/QTC/QTR series



## Wiring Instructions(using transistor)

• In case of wiring with transistors, please select the proper transistor type : either NPN or PNP based on the source voltage setting.

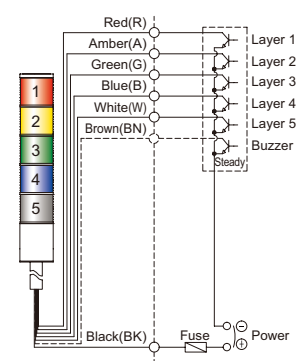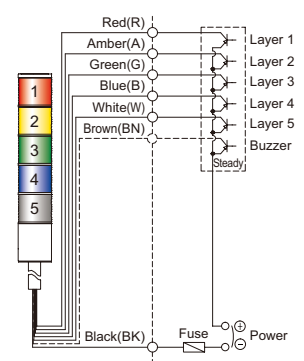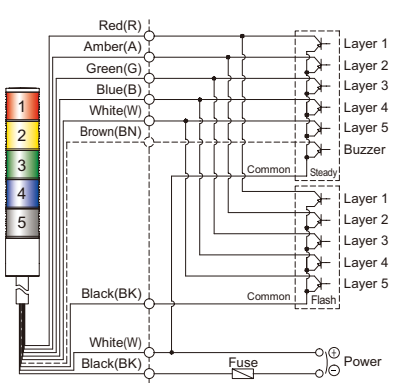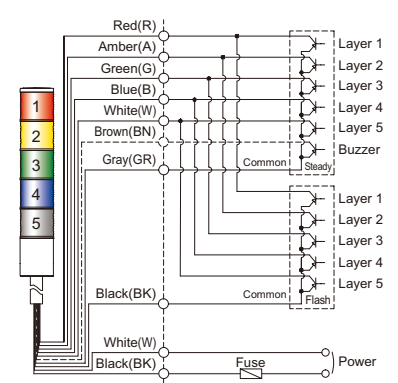Applied products	Wiring Instructions	
<p>DC Steady</p> <p>QTG50ML QTG50L QTG60ML QTG60L QTG70ML QTG70L QTC50ML QTC50L QTC60ML QTC60L QTC70ML QTC70L QTR50ML QTR50L QTR60ML QTR60L QTR70ML QTR70L</p>	<p>EXTERNAL TRANSISTOR-NPN</p>  <ul style="list-style-type: none"> <li>• QTG(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTC(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTR(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTGXXL</li> <li>• QTCXXL</li> <li>• QTRXXL</li> <li>└ Lens diameter 50(50mm) : QTR50(M)L</li> <li>60(60mm) : QTR60(M)L</li> <li>70(70mm) : QTR70(M)L</li> </ul>	<p>EXTERNAL TRANSISTOR-PNP</p> 
<p>DC Steady/Flashing</p> <p>QTG50MLF QTG50LF QTG60MLF QTG60LF QTG70MLF QTG70LF QTC50MLF QTC50LF QTC60MLF QTC60LF QTC70MLF QTC70LF QTR50MLF QTR50LF QTR60MLF QTR60LF QTR70MLF QTR70LF</p>	<p>EXTERNAL TRANSISTOR-PNP</p>  <ul style="list-style-type: none"> <li>• QTG(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTC(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTR(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTGXXL</li> <li>• QTCXXL</li> <li>• QTRXXL</li> <li>└ Lens diameter 50(50mm) : QTR50(M)L</li> <li>60(60mm) : QTR60(M)L</li> <li>70(70mm) : QTR70(M)L</li> </ul>	<p>AC Steady/Flashing</p> <p>EXTERNAL TRANSISTOR-PNP</p>  <ul style="list-style-type: none"> <li>• QTG(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTC(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTR(A)XX(M)L - Same wiring including buzzer type</li> <li>• QTGXXL</li> <li>• QTCXXL</li> <li>• QTRXXL</li> <li>└ Lens diameter 50(50mm) : QTR50(M)L</li> <li>60(60mm) : QTR60(M)L</li> <li>70(70mm) : QTR70(M)L</li> </ul>

- DC steady type : External power/ External signal line : UL1007 AWG22(0.3sq) 400mm
- AC steady, AC/DC steady/flashing type : External power line : UL1015 AWG18(0.75sq)×2C 400mm
- External signal line : UL1007 AWG22(0.3sq) 400mm