

B Type

The Basic HMI B Type is easy to install and offers basic functions for general industrial applications. With an IP65 rating, it is suitable for harsh environments.



Product Introduction

Features

- Multiple size options: 4.3" / 7"
- High-performance CPU: Cortex-A8
- Highly integrated design: Built-in 2 serial communication ports (D-Sub x 1), USB, and more
- Certification: CE / UL

Applications


Machinery and equipment in various sectors such as packaging, textiles, woodworking, rubber, and plastics

Product Specifications

	DOP-103BQ	DOP-107BV
Display	4.3" TFT	7" TFT
Resolution (Pixels)	480 x 272	800 x 480
Color		16-bit
CPU		Cortex-A8 800 MHz
ROM		256 MB
RAM		256 MB
COM Port		2 Serial COM Ports
USB		1 Slave / 1 Host
Certification		CE / UL
Operating Temperature		0 ~ 50°C
Storage Temperature		-20 ~ 60°C

Dimensions

DOP-107BV

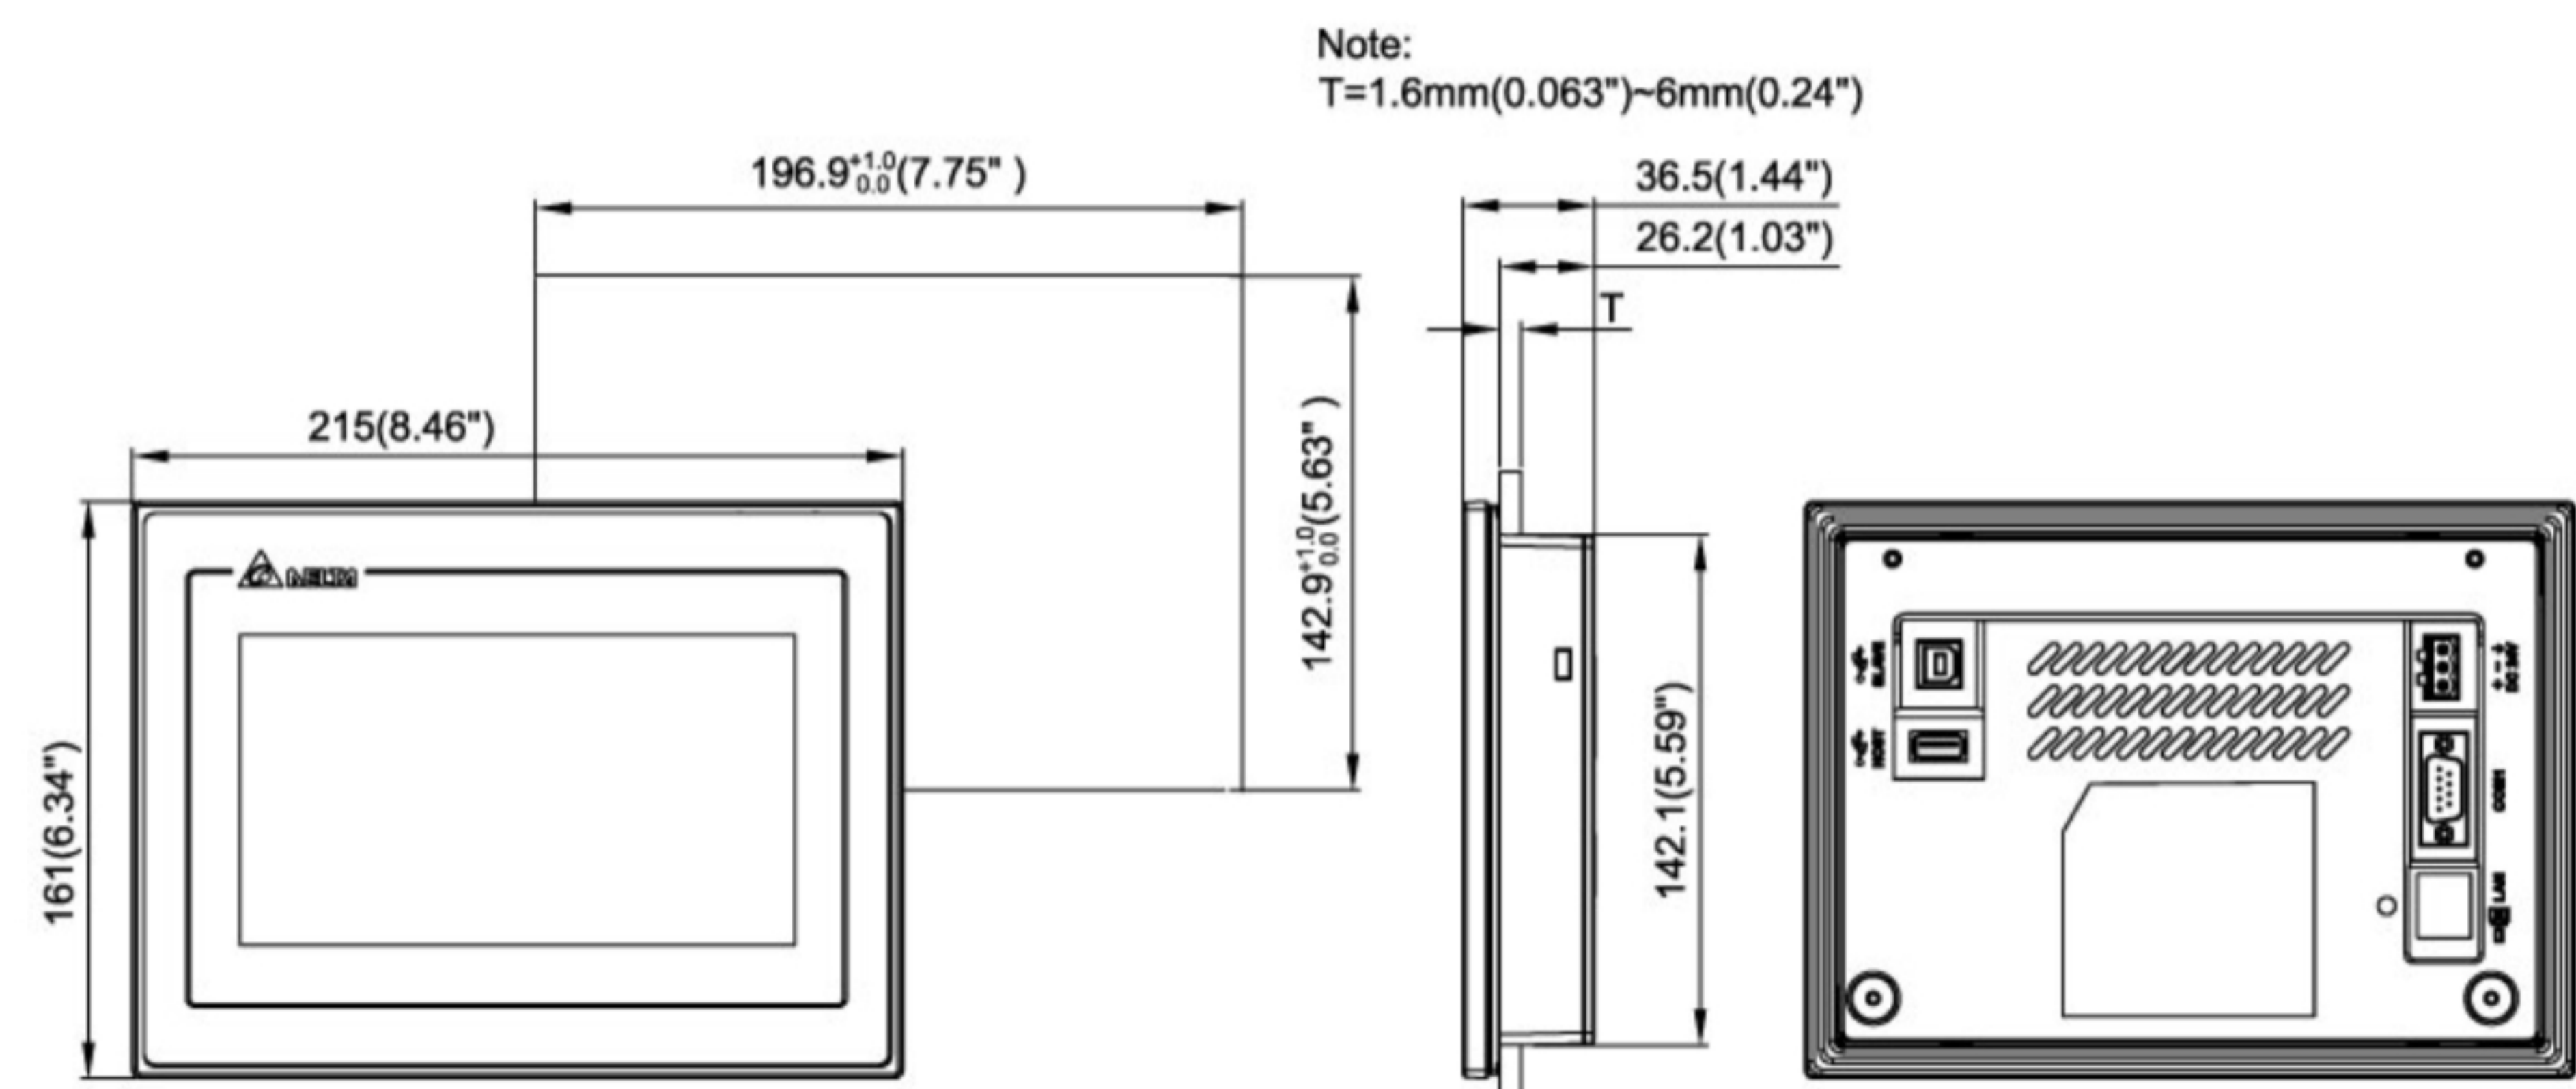

	Dimensions (W x H x D, mm)	Mounting Dimensions (W x H, mm)
DOP-103BQ	137 x 103 x 37.1	118.8 x 92.8
DOP-107BV	215 x 161 x 35.5	196.9 x 142.9