

D Type

The Basic HMI D Type is easy to install and offers basic functions for general industrial applications. With an IP65 rating, it is suitable for harsh environments.



Product Introduction

Features

- Multiple size options: 4.3" / 7"
- IPS design: Wide viewing angle (4.3")
- Highly integrated design: Built-in Ethernet port, 2 serial communication ports (D-Sub x 1), USB, and more
- Security isolation protection: Power isolation, Serial communication port isolation, Ethernet isolation (7" comes with only Ethernet isolation)
- Certification: CE / UL

Applications


Machinery and equipment in various sectors such as packaging, textiles, woodworking, rubber, and plastics

Product Specifications

	DOP-103DQ	DOP-107DV
Display	4.3" TFT	7" TFT
Resolution (Pixels)	480 x 272	800 x 480
Color	16-bit	
IPS	Yes	No
CPU	Cortex-A8 800 MHz	
ROM	256 MB	
RAM	512 MB	256 MB
Ethernet	1 Port	
COM Port	2 Serial COM Ports	
USB	1 Slave / 1 Host	
Certification	CE / UL	
Operating Temperature	0 ~ 50°C	
Storage Temperature	-20 ~ 60°C	

Dimensions

DOP-107DV

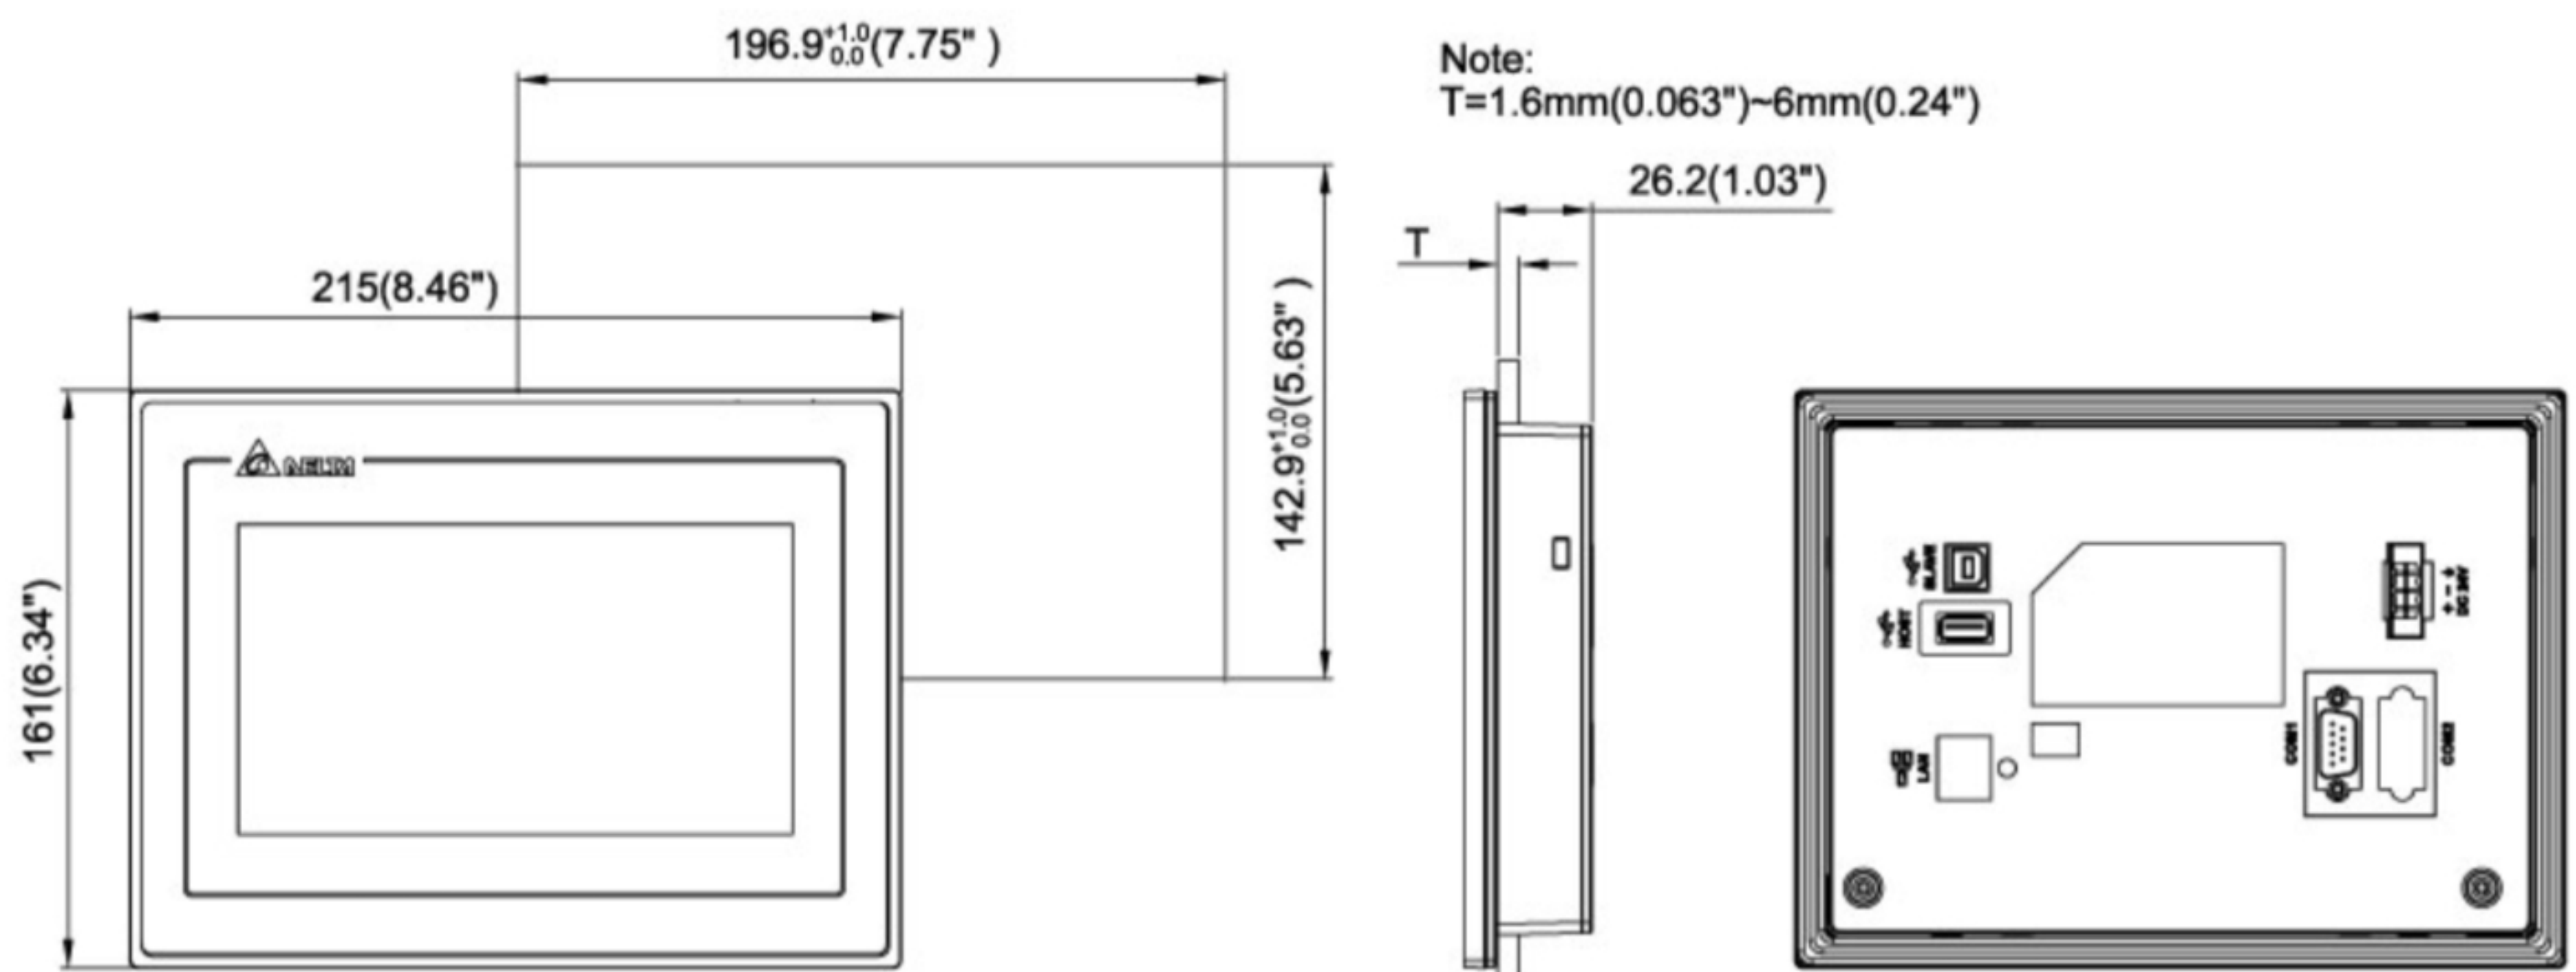

	Dimensions (W x H x D, mm)	Mounting Dimensions (W x H, mm)
DOP-103DQ	129 x 103 x 37.8	118.8 x 92.8
DOP-107DV	215 x 161 x 35.5	196.9 x 142.9