


product type designation

product description

IE FC RJ45 Plug 180 (2x2)

RJ45 data connector

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbit/s) with rugged metal enclosure and FC connection system, for IE FC TP cable 2x 2; 180° cable outlet 1 pack = 1 unit.

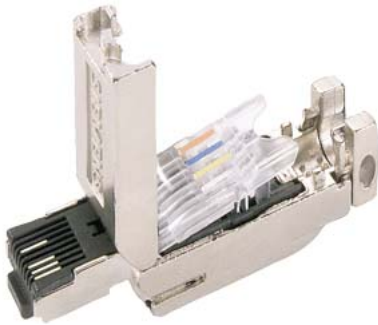

suitability for use

For connection to IE FC TP cables 2x2, suitable for fast assembly with the FastConnect system

transfer rate

transfer rate / for Industrial Ethernet

10 Mbit/s, 100 Mbit/s

interfaces

number of electrical connections

- for Industrial Ethernet FC TP cables
- for network components or terminal equipment

4

1

type of electrical connection

- for Industrial Ethernet FC TP cables
- for network components or terminal equipment

integrated cut-and-clamp contacts for 4-wire TP FC installation cable AWG22
RJ45 connector

type of electrical connection / FastConnect

Yes

mechanical data

material / of the enclosure

metal

number of reuses

10

locking mechanism design

other

design, dimensions and weights

type of cable outlet

180° cable outlet

width

13.7 mm

height

16 mm

depth

55 mm

net weight

35 g

connectable cable cross-section

6.5 ... 6.5 mm

connectable conductor cross-section

0.33 mm²

ambient conditions

ambient temperature

- during operation
- during storage
- during transport

-40 ... +85 °C

-40 ... +85 °C

-40 ... +85 °C

relative humidity

- at 25 °C / without condensation / during operation / maximum

95 %

protection class IP

IP20

product features, product functions, product components / general

product feature

- PoE capability
- PoE+capability
- silicon-free

Yes

Yes

Yes

product component	
<ul style="list-style-type: none"> • strain relief 	Yes
standards, specifications, approvals	
certificate of suitability	
<ul style="list-style-type: none"> • RoHS conformity • UL approval • cULus approval • railway application in accordance with EN 50155 	Yes Yes Yes No
standard for structured cabling	Cat5
reference code	
<ul style="list-style-type: none"> • according to IEC 81346-2:2019 	XGA

standards, specifications, approvals / Environmental Product Declaration

Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
<ul style="list-style-type: none"> • total • during manufacturing • during operation • after end of life 	0.277 kg 0.263 kg 0.0086 kg 0.0062 kg

further information / internet links

internet link	
<ul style="list-style-type: none"> • to website: Selection guide for cables and connectors • to web page: selection aid TIA Selection Tool • to website: Industrial communication • to web page: SiePortal • to website: Image database • to website: CAx-Download-Manager • to website: Industry Online Support 	https://support.industry.siemens.com/cs/ww/en/view/109766358 https://www.siemens.com/tstcloud https://www.siemens.com/simatic-net https://sieportal.siemens.com https://www.automation.siemens.com/bilddb http://www.siemens.com/cax https://support.industry.siemens.com

security information




security information	<p>Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry. Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under https://www.siemens.com/cert. (V4.7)</p>
----------------------	---


Approvals / Certificates

General Product Approval	Test Certificates
---------------------------------	--------------------------

Declaration of Conformity			Miscellaneous		Special Test Certificate
---	---	---	-------------------------------	---	--

Marine / Shipping	Environment	Industrial Communication
--------------------------	--------------------	---------------------------------

			Confirmation	PROFINET
---	---	---	------------------------------	--------------------------

last modified: 11/8/2024 


product type designation

IE FC RJ45 Plug 180 (2x2)

product description

RJ45 data connector

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbit/s) with rugged metal enclosure and FC connection system, for IE FC TP cable 2x 2; 180° cable outlet 1 pack = 10 units.

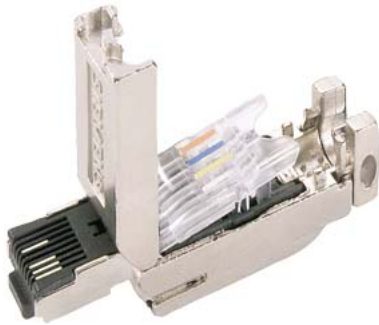

suitability for use

For connection to IE FC TP cables 2x2, suitable for fast assembly with the FastConnect system

transfer rate

transfer rate / for Industrial Ethernet

10 Mbit/s, 100 Mbit/s

interfaces

number of electrical connections

- for Industrial Ethernet FC TP cables
- for network components or terminal equipment

4

1

type of electrical connection

- for Industrial Ethernet FC TP cables
- for network components or terminal equipment

integrated cut-and-clamp contacts for 4-wire TP FC installation cable AWG22
RJ45 connector

type of electrical connection / FastConnect

Yes

mechanical data

material / of the enclosure

metal

number of reuses

10

locking mechanism design

other

design, dimensions and weights

type of cable outlet

180° cable outlet

width

13.7 mm

height

16 mm

depth

55 mm

net weight

35 g

connectable cable cross-section

6.5 ... 6.5 mm

connectable conductor cross-section

0.33 mm²

ambient conditions

ambient temperature

- during operation
- during storage
- during transport

-40 ... +85 °C

-40 ... +85 °C

-40 ... +85 °C

relative humidity

- at 25 °C / without condensation / during operation / maximum

95 %

protection class IP

IP20

product features, product functions, product components / general

product feature

- PoE capability
- PoE+capability
- silicon-free

Yes

Yes

Yes

product component	
<ul style="list-style-type: none"> • strain relief 	Yes
standards, specifications, approvals	
certificate of suitability	
<ul style="list-style-type: none"> • RoHS conformity • UL approval • cULus approval • railway application in accordance with EN 50155 	Yes Yes Yes No
resistance to air pollution / conformity according to ANSI/ISA-71.04	Yes
standard for structured cabling	Cat5
reference code	
<ul style="list-style-type: none"> • according to IEC 81346-2:2019 	XGA

standards, specifications, approvals / Environmental Product Declaration

Environmental Product Declaration	Yes
global warming potential [CO2 eq]	
<ul style="list-style-type: none"> • total • during manufacturing • during operation • after end of life 	0.277 kg 0.263 kg 0.0086 kg 0.0062 kg

further information / internet links

internet link	
<ul style="list-style-type: none"> • to website: Selection guide for cables and connectors • to web page: selection aid TIA Selection Tool • to website: Industrial communication • to web page: SiePortal • to website: Image database • to website: CAx-Download-Manager • to website: Industry Online Support 	https://support.industry.siemens.com/cs/ww/en/view/109766358 https://www.siemens.com/tstcloud https://www.siemens.com/simatic-net https://sieportal.siemens.com https://www.automation.siemens.com/bilddb https://www.siemens.com/cax https://support.industry.siemens.com

security information

security information	<p>Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry. Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under https://www.siemens.com/cert. (V4.7)</p>
----------------------	---

Approvals / Certificates

General Product Approval	Test Certificates
---------------------------------	--------------------------

[Declaration of Conformity](#)



[China RoHS](#)

[Miscellaneous](#)

[Special Test Certificate](#)

Maritime application	Environment	Industrial Communication
-----------------------------	--------------------	---------------------------------



[PROFINET](#)

last modified:

3/26/2025


product type designation

product description

IE FC RJ45 Plug 180 (2x2)

RJ45 data connector

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbit/s) with rugged metal enclosure and FC connection system, for IE FC TP cable 2x 2; 180° cable outlet 1 pack = 50 units.

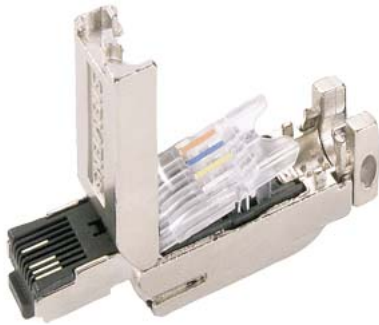

suitability for use

For connection to IE FC TP cables 2x2, suitable for fast assembly with the FastConnect system

transfer rate

transfer rate / for Industrial Ethernet

10 Mbit/s, 100 Mbit/s

interfaces

number of electrical connections

- for Industrial Ethernet FC TP cables
- for network components or terminal equipment

4

1

type of electrical connection

- for Industrial Ethernet FC TP cables
- for network components or terminal equipment

integrated cut-and-clamp contacts for 4-wire TP FC installation cable AWG22 RJ45 connector

type of electrical connection / FastConnect

Yes

mechanical data

material / of the enclosure

metal

number of reuses

10

locking mechanism design

other

design, dimensions and weights

type of cable outlet

180° cable outlet

width

13.7 mm

height

16 mm

depth

55 mm

net weight

35 g

connectable cable cross-section

6.5 ... 6.5 mm

connectable conductor cross-section

0.33 mm²

ambient conditions

ambient temperature

- during operation
- during storage
- during transport

-40 ... +85 °C

-40 ... +85 °C

-40 ... +85 °C

relative humidity

- at 25 °C / without condensation / during operation / maximum

95 %

protection class IP

IP20

product features, product functions, product components / general

product feature

- PoE capability
- PoE+capability
- silicon-free

Yes

Yes

Yes

product component	
<ul style="list-style-type: none"> • strain relief 	Yes
standards, specifications, approvals	
certificate of suitability	
<ul style="list-style-type: none"> • RoHS conformity • UL approval • cULus approval • railway application in accordance with EN 50155 	Yes Yes Yes No
resistance to air pollution / conformity according to ANSI/ISA-71.04	Yes
standard for structured cabling	Cat5
reference code	
<ul style="list-style-type: none"> • according to IEC 81346-2:2019 	XGA

standards, specifications, approvals / Environmental Product Declaration

Environmental Product Declaration	Yes
global warming potential [CO2 eq]	
<ul style="list-style-type: none"> • total • during manufacturing • during operation • after end of life 	0.277 kg 0.263 kg 0.0086 kg 0.0062 kg

further information / internet links

internet link	
<ul style="list-style-type: none"> • to website: Selection guide for cables and connectors • to web page: selection aid TIA Selection Tool • to website: Industrial communication • to web page: SiePortal • to website: Image database • to website: CAx-Download-Manager • to website: Industry Online Support 	https://support.industry.siemens.com/cs/ww/en/view/109766358 https://www.siemens.com/tstcloud https://www.siemens.com/simatic-net https://sieportal.siemens.com https://www.automation.siemens.com/bilddb https://www.siemens.com/cax https://support.industry.siemens.com

security information

security information	<p>Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry. Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under https://www.siemens.com/cert. (V4.7)</p>
----------------------	---

Approvals / Certificates

General Product Approval	Test Certificates
---------------------------------	--------------------------

[Declaration of Conformity](#)



[China RoHS](#)

[Miscellaneous](#)

[Special Test Certificate](#)

Maritime application	Environment	Industrial Communication
-----------------------------	--------------------	---------------------------------



[PROFINET](#)

last modified:

3/26/2025

